



Every™ Power.

Cummins Power Products.





In today's business world, you need a total package – one that delivers value of ownership, the most advanced technology and second-to-none support. Cummins Power Products offers a total solution for your power-unit needs, with a full range of diesel and compressed gas products from 60 hp to 1500 hp (45-1119 kW) and options designed to meet your specific needs.

Power By Design.

What is a power unit? Essentially, a power unit is “torque in a box,” specifically engineered to provide a solution for a mechanical power need. Every product we make is powered exclusively by a Cummins engine, the most rugged, reliable and advanced technology available. Customized to the unique specifications necessary to meet your power demands, Cummins Power Products designs the right product, with the right fit, to do the job right, backed by our global parts and service network.

Ready For Tier 4 Final.

Our Tier 4 Final technology solution for power units builds on the proven durability of our Tier 3 and Tier 4 Interim power units. Cummins has a unique advantage in that we design and develop all of the critical engine subsystems and aftertreatment components. Cummins Power Products then upfits the base engine and validates the entire power unit design to offer a completely integrated power package. The total system is optimized to minimize installation impact and achieve the lowest cost of operation.

Every Application.

There is added value in working with Cummins Power Products. We eliminate the need to search for the right components. We have done that for you, and the result is a package designed specifically for your job. We offer turnkey solutions in both open and enclosed platforms from a standard line of base-engine models or a customized unit specifically engineered for a unique piece of equipment in virtually any application. We have the people, processes and products to make it happen. Cummins Power Products employs a qualified engineering staff with decades of experience in Pro/ENGINEER design. Our power units are built for everything from brush chippers and rock crushers to dewatering pumps and rail maintenance units. And if your need for power is larger than that, we also work on mud pumps, frac rigs and other heavy-duty applications.



Durable and reliable power for oil field equipment.



Locomotive and rail maintenance track packs keep business moving.


The Cummins Power Products Difference.

Quality. Experience. Support. All customized for you. We don't take these things lightly. Our quality standards are unmatched in the power unit industry. Through our state-of-the-art production processes and a battery of product tests, each power unit provides unparalleled quality and dependability. Since 1997, we have produced over 30,000 power units designed to unique standards. And each one has the backing of Cummins worldwide parts and service network to support you.


1,500 By Design. One For You.

With over 1,500 options available, a design may already exist to fit your exact need. We have already done the work to meet Tier 4 emissions requirements, with a number of models available. If no existing models meet your need, Cummins Power Products utilizes virtual prototyping to ensure a correct design and fit for your specific application. Our prototyping is very competitive, and allows close accuracy to the actual part production pricing. Some of the customizable options available include:

- Electronic or mechanical controls
- Cooling packages
- Mounting options
- Intake and exhaust locations
- Instrument panel locations

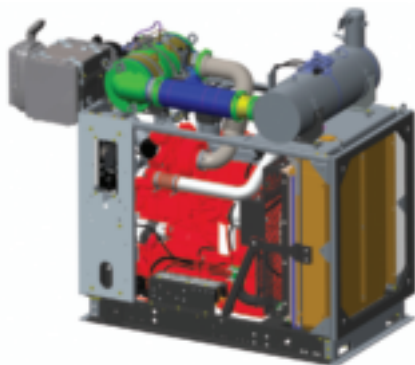

QSB6.7 Tier 4 Final Standard Package

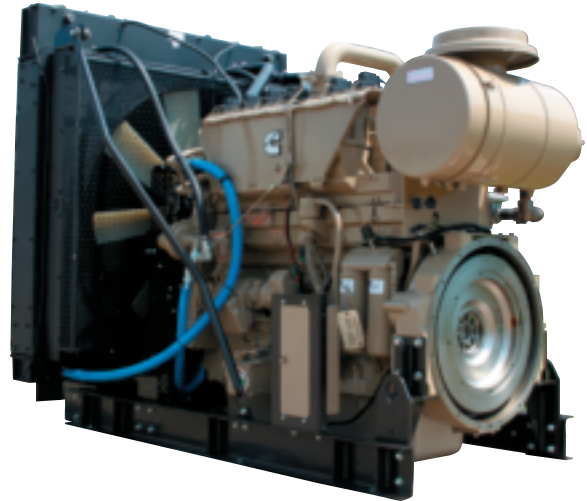

Every Strength.

There is power in our power units. Cummins Power Products power units last longer because they are built better. Our enclosure housings use 12-gauge steel. All metals are powder-coated, which increases chip resistance and allows our units to pass 1,000-hour salt spray tests. Components are bolted, not welded, so they resist mounting distortion and are easier to service. Each engine design is fully tested by Cummins Power Products to meet or exceed Cummins application guidelines. In addition, the electrical systems on each of our power units are tested before they leave our factory. Our power units are built and tested to handle the most extreme conditions.



Cummins Power Products' advanced engineering design process utilizes 3D prototyping in a virtual environment to customize each power unit to the exact needs of the customer and application.

Our Confidence. Total Coverage.

The warranty for Cummins Power Products power units mirrors the Cummins Industrial warranty. The first year is completely covered regardless of the number of hours run. Coverage continues through the second year or until 2,000 hours of operation have been reached (whichever occurs first).

World-Class Service. Every Time.

Cummins Power Products is a global provider of power units. Our value with customers overseas is realized in the dependability and durability of our products. We've shipped units to customers all over the world. Each power unit is backed by Cummins worldwide parts and service network. With over 6,600 authorized service locations around the world, your power unit will have support wherever you need it. Qualified technicians and Genuine Cummins Parts are never far away, even in the most remote location.



Every Advantage.

Cummins QuickServe® offers you factory-trained technicians, the most sophisticated diagnostic and repair tools in the industry and the largest international parts and service network of any engine manufacturer. Our worldwide team of mobile service technicians is always ready to deliver service when and where you need it. Every minute. Every day. Every year. Plus, Cummins distributors have access to an entire library of parts and service information for Cummins engines on the Internet. QuickServe Online provides engine part numbers, diagrams, service bulletins and alerts, up-to-date supersessions and more – 24 hours a day, for nearly 11 million Cummins engines. The Cummins Power Products web site is linked through QuickServe Online for rapid serial number identification.



Every Contact.

Cummins Power Products offer the best long-term value for your equipment needs and cost of ownership, whether your power unit is one of our standard configurations or designed specifically for your application and equipment. To learn more about Cummins Power Units, and to realize the power of our design, contact your local Cummins distributor location. Find out how we can design the exact power to work for you.

Cummins Power Products.

Engine Ratings Gross Horsepower (w/o Fan)

ENGINE MODEL	EMISSIONS TIER	HORSEPOWER RANGE (BHP)	HORSEPOWER RANGE (kW)	DISPLACEMENT (CU IN)	LENGTH (IN)	OPEN			WEIGHT (LB)	LENGTH (IN)	ENCLOSED			CENTERLINE HEIGHT (IN)
						WIDTH (IN)	HEIGHT (IN)	WEIGHT (LB)						
Diesel Products														
QSF2.8-P*	T4F	49-74	37-55	171	NA	NA	NA	NA	NA	NA	NA	NA	NA	
B3.3NA-P	4i	60-65	45-48	199	40.20	33.68	47.20	842	47.88	30.00	53.28	884	12.50	
B3.3T-P	4i	74	55	199	40.20	33.68	47.60	842	36.98	30.00	53.28	884	12.50	
B3.3TAA-P	3	75-85	56-63	199	53.24	39.49	58.56	1017	41.75	33.68	58.56	1121	12.50	
QSB3.3-P	4i	85-120	63-89	199	NA	NA	NA	NA	43.82	29.46	53.05	NA	12.50	
QSB3.3-P	3	80-110	60-82	199	53.24	39.49	58.56	1017	41.75	33.68	58.56	1121	12.50	
B4.5-P	2	80	60	275	47.40	29.25	69.40	1208	47.44	31.54	58.13	1332	13.06	
B4.5T-P	2	92-99	68-74	275	52.30	29.25	65.40	1208	43.00	31.55	60.34	1332	13.06	
QSB4.5-P	4i	110-163	82-122	272	59.40	38.50	56.40	1431	53.80	35.00	56.40	1574	13.14	
QSB4.5-P	3	110-170	82-127	272	57.45	31.88	65.40	1270	48.00	31.88	61.82	1461	13.14	
QSB6.7	T4F	146-300	109-223	408	NA	NA	NA	NA	58.10	48.70	66.10	NA	NA	
QSB6.7-P	4i	146-173	109-129	409	65.31	40.82	57.13	1915	58.00	36.30	66.50	2165	14.10	
QSB6.7-P	4i	190-300	142-223	409	65.31	40.82	57.13	1915	58.00	36.30	66.50	2165	14.10	
QSB6.7-P	3	190-275	142-205	409	68.48	33.91	81.80	1800	58.00	33.91	69.91	2050	14.10	
QSC8.3-P	3	305	172-227	506	77.25	41.32	82.26	2380	64.75	41.32	81.03	2755	16.50	
QSL9	T4F	230-380	172-283	543	NA	NA	NA	NA	NA	NA	NA	NA	NA	
QSL9-P	4i	230-380	172-283	543	74.20	41.30	61.70	NA	64.80	41.30	72.40	2794	16.50	
QSL9-P	3	300-365	224-272	543	77.25	41.32	82.26	2380	64.75	41.32	81.03	2755	16.50	
QSM11-P	3	300-400	224-298	660	77.38	46.88	70.07	3394	74.49	43.10	82.22	3718	20.00	
QSX11.9	4i	350-500	261-373	726	85.90	48.00	78.50	4121	NA	NA	NA	NA	20.00	
QSX15	T4F	450-625	336-466	912	NA	NA	NA	NA	NA	NA	NA	NA	NA	
QSX15-P	4i	400-600	298-447	912	87.80	57.50	85.50	5034	NA	NA	NA	NA	20.00	
QSX15-P	3	375-630	280-470	915	106.25	62.75	84.05	5140	106.25	62.75	94.29	5750	20.00	
QSK19-P	3	560-700	418-522	1159	115.13	61.88	78.78	6570	NA	NA	NA	NA	16.02	
QSK19-P	2	525-700	391-522	1150	116.13	62.81	78.64	7100	NA	NA	NA	NA	15.88	
QSK19-P	2	755-800	563-597	1150	116.13	62.81	78.64	7200	NA	NA	NA	NA	16.00	
QSK19-P	1	755-800	563-597	1150	114.25	62.00	78.52	6530	NA	NA	NA	NA	16.02	
QSK23-P	2	760-950	567-708	1412	NA	NA	NA	NA	NA	NA	NA	NA	23.00	
QST30-P	1	760-1200	567-895	1861	156.00	59.71	92.27	11400	NA	NA	NA	NA	27.00	
QST30-P	1	1350-1500	1007-1119	1861	131.34	95.00	110.66	16120	NA	NA	NA	NA	27.00	
QST30-P	2	760-1200	567-895	1861	142.00	82.00	96.71	11400	NA	NA	NA	NA	27.00	
QST30-P	2	1350-1500	1007-1119	1861	NA	NA	NA	NA	NA	NA	NA	NA	27.00	
QSK38-P	2	920	686	2300	146.66	86.13	103.06	NA	NA	NA	NA	NA	30.00	
Natural Gas Products														
G5.9	NA	41-99	31-74	359	65.74	33.91	64.72	1530	64.52	33.91	70.41	1641	17.65	
G5.9e	NA	70-99	52-74	359	NA	NA	NA	NA	68.02	33.91	69.51	1899	17.65	
G8.3	NA	99-135	74-101	505	67.38	41.32	73.80	1860	60.69	41.32	71.75	2525	17.75	
G8.3e	NA	99-118	74-88	505	NA	NA	NA	NA	72.81	41.32	69.26	2444	17.75	
GTA8.3 SLB	NA	175	131	505	78.50	48.88	71.50	NA	77.25	43.90	75.50	NA	17.75	
G855	NA	157-188	117-140	855	92.50	42.76	66.38	3900	NA	NA	NA	NA	22.38	
G855e	NA	157-188	117-140	855	83.17	42.70	77.59	3944	NA	NA	NA	NA	22.38	
GTA855	NA	213-286	159-213	855	100.00	59.76	74.25	4596	NA	NA	NA	NA	22.38	
GTA855e	NA	225	168	855	93.00	62.25	84.75	NA	NA	NA	NA	NA	22.38	
KTA19GC	NA	265-420	198-313	1125	112.57	60.00	74.87	6495	NA	NA	NA	NA	21.13	
KTA19GC SLB	NA	380-420	283-313	1125	104.96	62.25	80.50	6495	NA	NA	NA	NA	21.13	
KTA38GC SLB	NA	635-850	474-634	2300	153.78	85.25	100.75	16500	NA	NA	NA	NA	29.89	
KTA38GC-E	NA	635-760	474-567	2300	NA	NA	NA	NA	234.60	85.50	152.30	26,114	29.89	

- Dimensions and weights will vary slightly depending on the exact engine configuration.
- All ratings are restricted unless otherwise noted. Some ratings are intermittent.
- Height dimensions are measured from bottom of rail to highest point on unit, usually the muffler.
- Natural gas power unit centerline height indicated with high-capacity oil pans.
- 4i Refers to Tier 4 Interim EPA 2011 emissions standards.
- T4F refers to Tier 4 Final EPA 2014 emissions standards.
- * Anticipated 2014 releases planned.

Cummins and Cummins Power Products are pioneers in product improvement. Thus, specifications may change without notice. Illustrations may include optional equipment.

Options.

[illegible]

[illegible]



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

Phone: 1-800-DIESELS™ (1-800-343-7357)
Fax: 1-800-232-6393
Internet: cumminsengines.com

[Twitter.com/CumminsEngines](https://twitter.com/CumminsEngines)
[YouTube.com/CumminsEngines](https://www.youtube.com/CumminsEngines)

Bulletin 4087018 Printed in U.S.A. Rev. 1/14
©2014 Cummins Inc.